








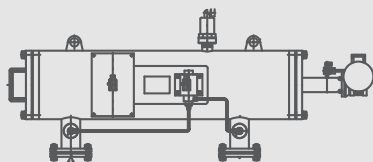










**BOWNT**  

---

**BOC-CFHG**



# BOC CFHG SERIE

## Application

- Membrane system such as UF/RO/EDI unit security filtration.
- Other applications include in power, electronic, chemical, waste water reuse, municipal, SWRO, landfill leachate treatment and separation technology etc.

## Characteristics

- Multi-cartridges FRP filter is applicable for 20"/40"/60" high flow pleated cartridges.
- FRP filter has better chemical resistance.
- Maximum working pressure up to 100psi.
- Flexible design, easy replacement of cartridges.
- Space saving.

Model	Max. flow ( gpm ) ( m <sup>3</sup> /h )	Cartridge length	Cartridge quantity	Filter housing diameter	Connection	Micron ratings ( μm )
BOC CFHG 1640-3	660 150	40"	3	16"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 1660-3	924 210	60"	3	16"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 3240-12	2640 600	40"	12	32"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 3260-12	3696 840	60"	12	32"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 5240-34	7480 1700	40"	34	52"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 5260-34	10560 2400	60"	34	52"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 6340-54	11880 2700	40"	54	63"	side connection	1、 3、 5、 10、 20、 40、 70
BOC CFHG 6360-54	16720 3800	60"	54	63"	side connection	1、 3、 5、 10、 20、 40、 70

16: Filter housing diameter 16"

40: Cartridge length 40"

60: Cartridge length 60"

3: Three cartridges



# BOWNT



# BOWNT

WWW.BOWNT.COM

AIOLIA INTERNATIONAL LLC., 1757 ASCOT COURT BLOOMFIELD MI 48302 PHONE : +1 248 252 1773 FAX: +1 248 562 7414 EMAIL : INFO@BOWNT.COM

