









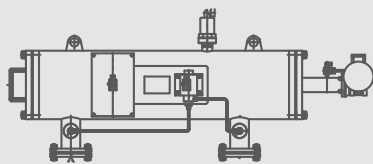










**BOWNT**  

---

**BOC-CFVS**



## BOC CFVS SERIE

- Filter housing adopts quick-opening design, compact structure for space saving and easy replacement of cartridges.
- Filter housing with standard design pressure of 87psi(0.6MPa), which can be customized for other pressure range.
- Filter housing material: SS304、SS316、316L.
- High pressure and temperature resistance, mature technology and wide range of applications.

Model	Cartridge quantity	Max. Flow ( gpm ) ( m <sup>3</sup> /h )	Housing diameter	Inlet/outlet size inch	Frame material	Connection	Dry weight ( kg )	Wet weight ( kg )
BOC CFVS 0840-1	1	220 50	8"	4"	SS304/SS316 (optional for other materials)	Flange	70	125
BOC CFVS 1640-2	2	440 100	16"	6"			220	480
BOC CFVS 1640-3	3	660 150	16"	6"			220	480
BOC CFVS 2040-4	4	880 200	20"	8"			350	750
BOC CFVS 2240-5	5	1100 250	22"	8"			450	950
BOC CFVS 2440-6	6	1320 300	24"	8"			500	1160
BOC CFVS 2440-7	7	1540 350	24"	10"			500	1160
BOC CFVS 3040-8	8	1760 400	30"	10"			950	2100
BOC CFVS 3040-9	9	1980 450	30"	10"			950	2100
BOC CFVS 3040-10	10	2200 500	30"	10"			950	2100



# BOWNT

WWW.BOWNT.COM

AIOLIA INTERNATIONAL LLC., 1757 ASCOT COURT BLOOMFIELD MI 48302 PHONE : +1 248 252 1773 FAX: +1 248 562 7414 EMAIL : INFO@BOWNT.COM

