








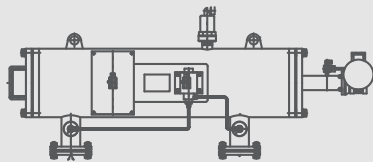










BOWNT

BOC-CFHS



BOC CFHS SERIE

- Filter housing adopts quick-opening design, compact structure for space saving and easy replacement of cartridges.
- Filter housing with standard design pressure of 87psi(0.6MPa),which can be customized for other pressure range.
- Filter housing material: SS304、SS316、316L.
- High pressure and temperature resistance, mature technology and wide range of applications.
- CFHS serie filter is applicable for 60"high flow pleated cartridges.

Model	Cartridge quantity	Max. Flow (gpm) (m3/h)	Housing diameter	Inlet/outlet size inch	Frame material	Connection	Dry weight (kg)	Wet weight (kg)
BOC CFHS 0860-1	1	308 70	8"	4"	SS304/SS316 (optional for other materials)	Flange	100	180
BOC CFHS 1660-2	2	616 140	16"	6"			250	560
BOC CFHS 1660-3	3	924 210	16"	8"			280	660
BOC CFHS 2060-4	4	1232 280	20"	8"			390	850
BOC CFHS 2260-5	5	1540 350	22"	10"			500	1000
BOC CFHS 2460-6	6	1848 420	24"	10"			570	1300
BOC CFHS 2460-7	7	2156 490	24"	12"			570	1300
BOC CFHS 3060-8	8	2464 560	30"	12"			950	2200
BOC CFHS 3060-9	9	2772 630	30"	12"			950	2200
BOC CFHS 3060-10	10	3080 700	30"	12"			950	2200



BOWNT

WWW.BOWNT.COM

AIOLIA INTERNATIONAL LLC., 1757 ASCOT COURT BLOOMFIELD MI 48302 PHONE : +1 248 252 1773 FAX: +1 248 562 7414 EMAIL : INFO@BOWNT.COM

