



BOP5-RO40

End-in type and Side-in type Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 1000 Psi;
Polished or brushing external surface .



STANDARD SPECIFICATIONS

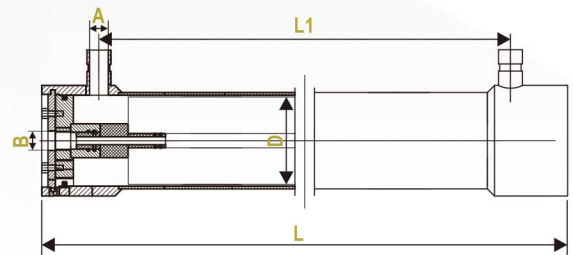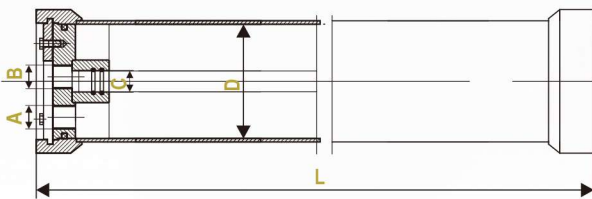

Model	L (mm)	C (mm)	D (mm)	A (in)	B (out)
BOP5-4021E	612	φ 19.5	φ 102	1/2 " 3/4 "	1/2 "
BOP5-4040E-1	1094	φ 19.5	φ 102	1/2 " 3/4 "	1/2 "
BOP5-4040E-2	2110	φ 19.5	φ 102	3/4 "	1/2 "
BOP5-4040E-3	3126	φ 19.5	φ 102	3/4 "	1/2 "
BOP5-4040E-4	4142	φ 19.5	φ 102	3/4 "	1/2 "

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BOP5-2540S	1162	1034	φ 62	1/2 " -3/4 "	1/2 "
BOP5-4021S	730	602	φ 102	3/4 " -1 "	1/2 "
BOP5-4040S-1	1212	1084	φ 102	3/4 " -1 "	1/2 "
BOP5-4040S-2	2228	2100	φ 102	3/4 " -1 "	1/2 "
BOP5-4040S-3	3244	3116	φ 102	3/4 " -1 "	1/2 "
BOP5-4040S-4	4260	4132	φ 102	3/4 " -1 "	1/2 "