



BOP8-RO80

Victaulic port type and Tri-clover port type Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 600 Psi;
Polished or sandblast external surface.



STANDARD SPECIFICATIONS

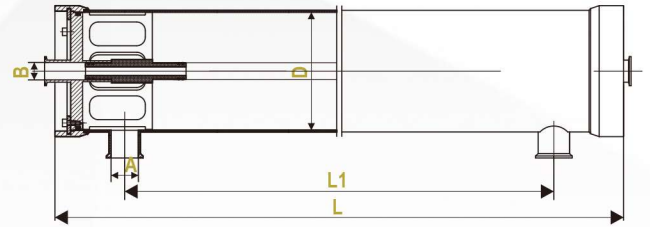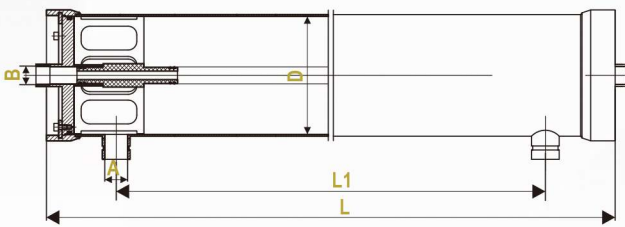

| Model | L (mm) | L1 (mm) | D (mm) | A (in) | B (out) |
|--------------|-----------|------------|-----------|--------------|------------|
| BOP8-8040V-1 | 1359 | 1119 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-2 | 2375 | 2135 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-3 | 3391 | 3151 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-4 | 4407 | 4167 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-5 | 5423 | 5183 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-6 | 6439 | 6199 | φ 203 | 1 1/2 " -3 " | 1 " |
| BOP8-8040V-7 | 7357 | 7337 | φ 203 | 1 1/2 " -3 " | 1 " |

| Model | L (mm) | L1 (mm) | D (mm) | A (in) | B (out) |
|--------------|-----------|------------|-----------|--------------|------------|
| BOP8-8040T-1 | 1359 | 1119 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-2 | 2375 | 2135 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-3 | 3391 | 3151 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-4 | 4407 | 4167 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-5 | 5423 | 5183 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-6 | 5423 | 5183 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |
| BOP8-8040T-7 | 7357 | 7337 | φ 203 | 1 1/2 " -3 " | 1 " -1/2 " |